FY295-04

沙水组合 | Cascading sand and water station

技术资料 / TECHNICAL DATA SHEET

01 主视图 / MAIN VIEW

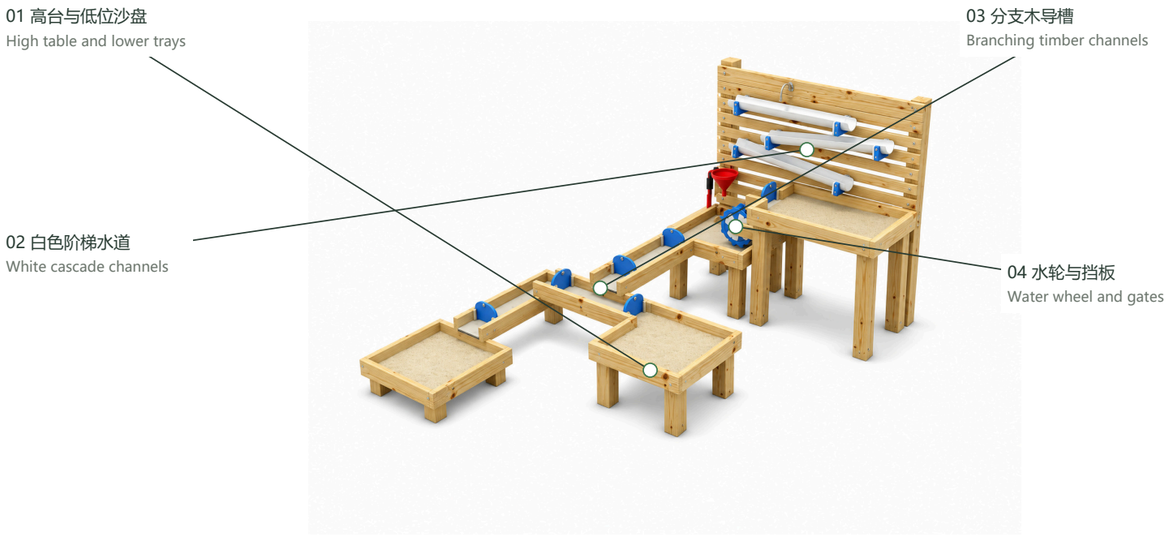

03 俯视图 / TOP VIEW

未提供 / Not specified

02 第二视图 / SECOND VIEW

未提供 / Not specified

材质说明 / MATERIAL SPECIFICATION

材料：芬兰木、PVC、LLDPE或HDPE、PE板材等，完整用料见部件表。

Materials: Finnish timber; PVC; LLDPE or HDPE; PE sheet. Full allocation in component schedule.

产品参数 / PRODUCT DATA

长度 Length	2000 mm / 200 cm
宽度 Width	2500 mm / 250 cm
总高 Total height	1400 mm / 140 cm
年龄 Age group	**待确认 / TBC**
人数 Users	**待确认 / TBC**
跌落高度 Free fall	**待确认 / TBC**
安全区 Safety zone	**待确认 / TBC**

材质状态 / MATERIAL STATUS

● 材质 / Materials　　仅列确认材质 / Confirmed only

材质确认不代表规格确认 / Material status excludes unspecified sizes

FY295-04

沙水组合 | Cascading sand and water station

技术资料 / TECHNICAL DATA SHEET

部件与材质明细 / COMPONENT & MATERIAL SCHEDULE

编号	部件 / COMPONENT	材质 / MATERIAL	部件说明 / FUNCTION	状态 / STATUS
01	高台与低位沙盘 High table and lower trays	芬兰木。 Finnish timber.	不同高度的托盘通过导槽连接 Trays at different heights connect through channels	材质已确认 Confirmed
02	白色阶梯水道 White cascade channels	PVC。 PVC.	背板上的连续导流构件 Successive channels mounted to the backboard	材质已确认 Confirmed
03	分支木导槽 Branching timber channels	芬兰木。 Finnish timber.	分向连接前端沙盘 Branches toward the front trays	材质已确认 Confirmed
04	水轮与挡板 Water wheel and gates	LLDPE或HDPE；PE板材。 LLDPE or HDPE; PE sheet.	配合水流观察与导流控制；机构待确认 Supports flow observation/control; mechanism TBC	范围已确认 Range confirmed
05	连接、安装与配套 Connections, installation and supply	304不锈钢。 304 stainless steel.	安装节点与供货清单由厂家确认；画面沙、水和散放玩具为展示内容 Manufacturer to confirm installation and supply list; sand, water and loose toys are display content	材质已确认 Confirmed

未提供的厚度、管径、涂层、连接、承载及安全参数未作推定。
Unspecified thicknesses, tube sizes, finishes, connections, loads and safety parameters are not inferred.