FY295-07

沙水墙二 | Sand and water activity wall II

技术资料 / TECHNICAL DATA SHEET

01 主视图 / MAIN VIEW

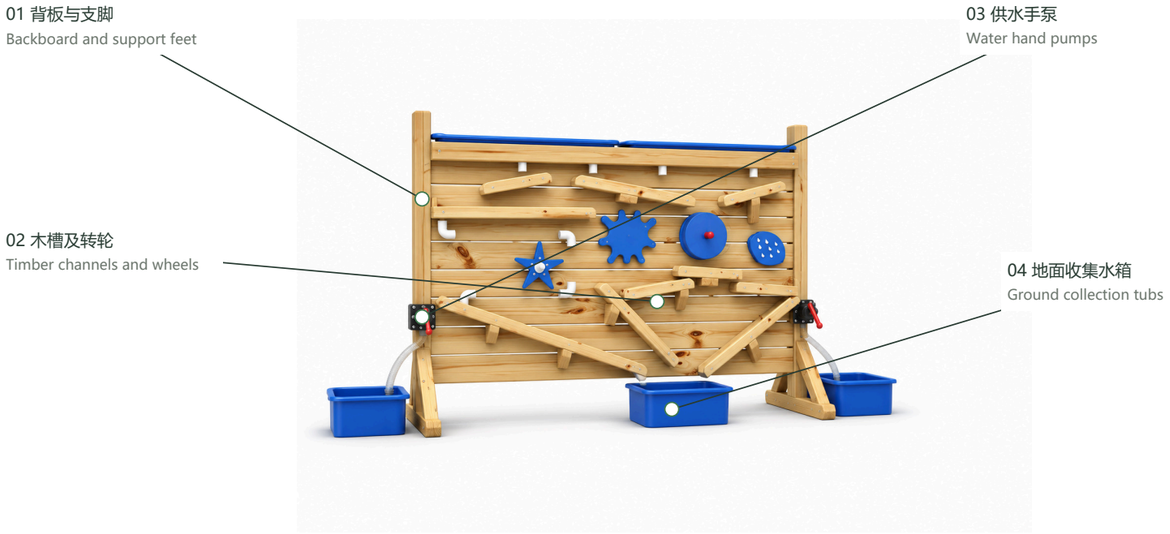

02 第二视图 / SECOND VIEW

未提供 / Not specified

03 俯视图 / TOP VIEW

未提供 / Not specified

材质说明 / MATERIAL SPECIFICATION

材料：芬兰木、LLDPE或HDPE、PVC、不锈钢或金属等，完整用料见部件表。

Materials: Finnish timber; LLDPE or HDPE; PVC; Stainless steel or metal. Full allocation in component schedule.

产品参数 / PRODUCT DATA

长度 Length	2000 mm / 200 cm
宽度 Width	850 mm / 85 cm
总高 Total height	1200 mm / 120 cm
年龄 Age group	**待确认 / TBC**
人数 Users	**待确认 / TBC**
跌落高度 Free fall	**待确认 / TBC**
安全区 Safety zone	**待确认 / TBC**

材质状态 / MATERIAL STATUS

● 材质 / Materials　　仅列确认材质 / Confirmed only

材质确认不代表规格确认 / Material status excludes unspecified sizes

FY295-07

沙水墙二 | Sand and water activity wall II

技术资料 / TECHNICAL DATA SHEET

部件与材质明细 / COMPONENT & MATERIAL SCHEDULE

编号	部件 / COMPONENT	材质 / MATERIAL	部件说明 / FUNCTION	状态 / STATUS
01	背板与支脚 Backboard and support feet	芬兰木。 Finnish timber.	固定操作附件并支承落地 Mounts accessories and provides ground support	材质已确认 Confirmed
02	木槽及转轮 Timber channels and wheels	芬兰木；LLDPE或HDPE。 Finnish timber; LLDPE or HDPE.	形成多级流动观察路径 Forms a multilevel flow-observation path	范围已确认 Range confirmed
03	供水手泵 Water hand pumps	管路：PVC；泵内运动金属件：不锈钢或金属。 Pipework: PVC; pump moving metal parts: stainless steel or metal.	输送容器中的水；泵规格待确认 Moves water from tubs; pump specification TBC	范围已确认 Range confirmed
04	地面收集水箱 Ground collection tubs	LLDPE或HDPE。 LLDPE or HDPE.	展示三只；容量及供货配置待确认 Illustration shows three; capacity and supplied configuration TBC	范围已确认 Range confirmed
05	连接、安装与配套 Connections, installation and supply	304不锈钢。 304 stainless steel.	安装节点与供货清单由厂家确认；画面沙、水和散放玩具为展示内容 Manufacturer to confirm installation and supply list; sand, water and loose toys are display content	材质已确认 Confirmed

未提供的厚度、管径、涂层、连接、承载及安全参数未作推定。
Unspecified thicknesses, tube sizes, finishes, connections, loads and safety parameters are not inferred.